

WYKAMOL TAPE

Wykamol Membrane Tape is used for the sealing of Wykamol Membranes, as part of a Cavity Drain Membrane System.



A high quality 28mm wide butyl double sided tape. This tape is for use in the installation of Wykamol Cavity Drain Membranes and is used to tape 2 sheets of membrane together on walls or floors.

Easy to use and very high quality HP600 grade bitumum makes this a long term solution for all membrane work.

When specifying these products you can rest assured that each of these tapes will last and remain flexible throughout the life of the waterproofing project.

ADVANTAGES

- Provides a waterproof seal when correctly installed
- Double sided tape
- Works in conjunction with all Wykamol Waterproofing Membranes
- Good adhesion to a wide range of substrates once primed with Technoseal .
- Good UV resistance.
- The softer composition makes this product highly conformable.
- Easy and accurate to use with little waste and no mess.
- High tack.
- Remains flexible throughout its service life.

TYPICAL USES

For use as a water seal for compression joints and seams. For joining polyethylene sheeting in building and construction.

PACK SIZE AND COVERAGE

Pack Size	Product Code
1 Roll 28mm x 22.5m	WYKTAPE

STORAGE & SHELF LIFE


Keep tape rolled up when not in use. Keep away from damp or heat and store in box provided. Shelf life is 24 months when stored flat in original packaging in cool, dry conditions.

HEALTH AND SAFETY

For further information and advice, please contact the Wykamol Technical Department and consult the safety data sheet, which is available upon request or can be downloaded from our website.



PERFORMANCE	UNIT	NOMINAL VALUE	TEST METHOD
Dynamic Tensile Adhesion	N/cm ²	32	H5
Dynamic Shear Adhesion	N/cm ²	12	H15
90° Peel Adhesion	N/cm	8	H48
180° Peel Adhesion	N/cm	9	H41
Specific Gravity	g/cm ³	1.6	H6
Moisture Vapour Transmission Rate	g/m ² /24hr/mm	0.14	ISO9932 / BS ISO 15106
Service Temperature Range	°C	-40 to +90	-

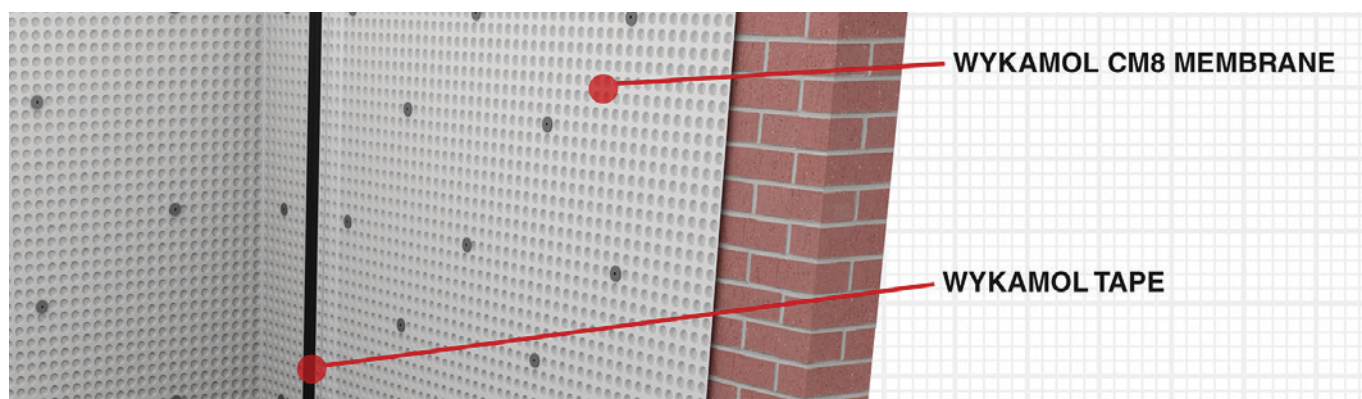

Unit 3, Boran Court, Network 65 Business Park, Hapton, Burnley
Lancashire BB11 5TH
t: +44 (0)845 4006666 f: +44 (0)845 4003333
www.wykamol.com e: info@wykamol.com

The information in this technical datasheet is given in good faith and was correct at the time of publication, but does not purport to be all inclusive. We reserve the right to update this information at any time without prior notice. All data is obtained through extensive testing in stringent laboratory conditions, however as we have no control over site conditions or work executed we accept no liability for incidental and/or consequential property damage arising out of the use of this product. The Wykamol Group's standard terms and conditions of sale apply.